



6,900 GALLON

EZ KLEEN™

SECONDARY CONTAINMENT TANK

Features

- 114% double containment for extra safety
- Completely enclosed tank inside of a tank
- Durable cross-linked polyethylene construction
- Highly chemical resistant
- EZ KLEEN™ tank with domed and sloped floor
- 3" PVC inlet and outlet valve with Viton seals
- 24" threaded manway
- Aluminum ladder with 24" work platform and safety chain
- Rain "tight" top prevents rain water intrusion
- Top mounted valve with siphon tube to prevent leaks

Technical


- The primary tank is completely enclosed in another tank with 114% of the primary tank's holding capacity
- wide range of chemical resistance for storing waste water, storm water, caustics, acids, fertilizer, contaminated ground water and many other liquids

Material Specifications

High density cross-linked polyethylene construction with a wide range of chemical resistance. (Chemical resistance charts are available.) The EZ KLEEN™ secondary containment tank has a domed and sloped floor to facilitate cleaning. It also comes equipped with a 3" PVC fill and drainage line and a valve with Viton seals. Our aluminum ladder has a 24" work platform with safety chain. The valving is located next to the ladder platform for convenience and safety. The rain tight top prevents the accumulation of rainwater between the primary and secondary tank walls.

Available Accessories

- Power Prime Pumps
- Spill Guard Containment berms
- Stainless Steel 304 and Carbon Steel storage tanks in
- Bi-Level, Mixer, Weir and Manifold configurations
- Polyethylene storage tanks
- Cartridge and bag filters
- HDPE pipe and fittings
- Roll off boxes, dewatering bins and vacuum boxes
- Flow meters and pressure reducing/ sustaining valves
- Aluminum Victaulic pipe and fittings
- Suction and discharge hose

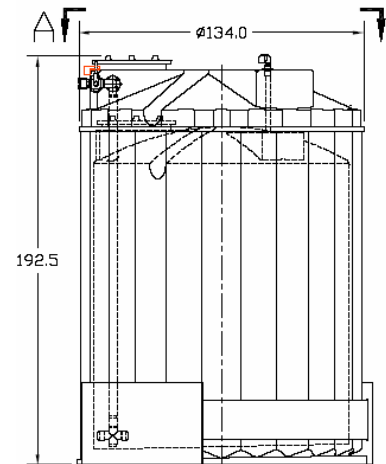

Rain for Rent

P.O. Box 2248
Bakersfield CA 93303
800-742-7246
661-393-1542
FAX 661-393-1542
www.rainforrent.com
info@rainforrent.com

Rain for Rent is a registered trademark of Western Oilfields Supply Company. Features and Specifications are subject to change without notice.